

# Carbon dioxide capture and storage: A route to net zero for power and industry

## In brief

Carbon capture and storage (CCS) is essential for net zero emissions to be achieved in any economy using fossil fuels or releasing carbon in any other ways. Improving efficiency and decreased emissions are a first priority.

However, for hard-to-decarbonise areas such as heavy industry, CCS may represent the last line of defence against carbon emissions. CCS is proven worldwide at industrial scales and is a reliable, secure, and auditable method of storing carbon for at least 10,000-year durations<sup>1,2</sup>.

## INSIGHTS

- Research indicates that CCS is required in most possible routes to achieve net zero emissions<sup>3,4</sup>.
- CCS is a proven technology option to decarbonise the power and industry sectors.
- With more experience of deployment needed for CCS to grow, clusters of multiple capture sites, feeding CO<sub>2</sub> through shared pipes, or shipping, to shared storage areas, provides a way to share and reduce unit costs. CCS projects of this type are being built and planned now.
- Research on novel capture technologies promises reduced costs in the future, but such new methods can take decades to become commercial.
- As well as CCS in industry, carbon dioxide removal, including negative emissions technologies such as direct air capture with carbon storage (DACCS), can help to achieve the widely agreed goal of net zero emissions by mid-century.
- Individual countries, or groups, can subsidise CCS or tax carbon to encourage capture and storage. However, to reliably store enough carbon to balance extraction, an obligation on carbon suppliers to undertake storage could be needed<sup>5</sup>.

# 1. The need for CCS – what it achieves

CCS features in most of the projected pathways to a net zero world examined by the Intergovernmental Panel on Climate Change (IPCC).

CO<sub>2</sub> is the dominant anthropogenic, or human-sourced, greenhouse gas (GHG) – generated by use of fossil fuels, biomass combustion, agriculture, and diffuse industrial and domestic sources. CO<sub>2</sub> emissions can be reduced through energy efficiency and substitution of fossil fuels by renewable or nuclear energy. However to achieve net zero emissions, any surplus emissions need to be captured and securely stored.

CCS features in most of the projected pathways to a net zero world examined by the Intergovernmental Panel on Climate Change (IPCC) where the global average temperature rise is kept to 1.5°C from a pre-industrial baseline<sup>3</sup>. The only exceptions are those with extraordinarily rapid decarbonisation of energy supply. In the International Energy Agency (IEA) Sustainable Development Scenario, in which net global CO<sub>2</sub> emissions from the energy sector fall to zero by 2070, CCS accounts for mitigation of around 5.6 billion tonnes of carbon dioxide per year by 2050 (GtCO<sub>2</sub>/yr), or around 140 times the present level of 40 million tonnes per year (MtCO<sub>2</sub>/yr)<sup>6</sup>.

## Definitions

**CCS** is defined by the IPCC as “A process in which a relatively pure stream of CO<sub>2</sub> from industrial and energy-related sources is separated (captured), conditioned, compressed and transported to a storage location for long-term isolation from the atmosphere”<sup>3</sup>.

**Carbon Capture and Use (CCU)** is defined by the IPCC as a process in which “CO<sub>2</sub> is captured and then used as a chemical feedstock reagent to produce a new product”. However, this seldom stores CO<sub>2</sub> for long durations. CO<sub>2</sub> has for example been used to manufacture of fuels, chemicals and plastics.

**CO<sub>2</sub> to EOR** describes a process where CO<sub>2</sub> is captured and used to help produce additional oil through enhanced oil recovery (EOR).

The IEA says reaching net zero will be “virtually impossible” without CCS and the UK’s Climate Change Committee has said: “CCS is a necessity, not an option”<sup>3,4</sup>.

CCS is the leading technology option to store emissions from four major routes:

### i. Providing electricity

CCS can be used to decrease CO<sub>2</sub> emissions from coal, gas, city waste or biomass-fired power stations and supply low-carbon electricity.

### ii. Supplying ‘blue’ hydrogen

CCS can be used to decarbonise the production of hydrogen from natural gas, biomass, or coal by capture before combustion. This creates so-called ‘blue hydrogen’, a versatile source of low-carbon energy for industry, transport, storage, and heat.

### iii. Decarbonising industry

CCS can capture CO<sub>2</sub> from industries such as oil refining, cement, iron and steel, paper, glass, and agricultural fertiliser, which together account for almost 20% of global anthropogenic CO<sub>2</sub> emissions<sup>6,7</sup>. The oil and gas industry, whose GHG emissions (UNFCCC Scope1 and Scope2) are around 10% of the global total, is well placed to lead in developing CCS as one of a series of measures that could significantly reduce its carbon footprint<sup>8</sup>.

### iv. Negative emission technologies (NETs)

NETs are technologies that remove CO<sub>2</sub> from the atmosphere. They include direct air carbon capture with carbon storage (DACCS), using chemical processes to capture CO<sub>2</sub> from the air, and bioenergy with carbon capture and storage (BECCS) which captures CO<sub>2</sub> from combustion or fermentation of biomass. NETs form part of a wider set of activities known as Carbon Dioxide Removal (CDR), defined by the IPCC as “anthropogenic activities removing CO<sub>2</sub> from the atmosphere and durably storing it in geological, terrestrial, or ocean reservoirs, or in products.” CDR and the even wider GGR (Greenhouse Gas Removal) also include nature-based solutions such as restoring forests and peatlands. (See briefing 9: *Climate change and land*).


## 2. The science and technology of CCS – how it works

CCS is not a single technology or activity, but a series of steps – capture, transport, and storage – which can be assembled in many different ways (Figure 1). Most CO<sub>2</sub> capture systems have been designed to

capture around 85 – 95% of the CO<sub>2</sub> from a point source. Reaching 99 – 100% typically requires larger equipment and multiple process steps that increase costs, for example by an estimated 10% for gas-fired power stations<sup>6</sup>.

**FIGURE 1**

Overview of carbon capture, transport, and storage (i)<sup>9</sup>.

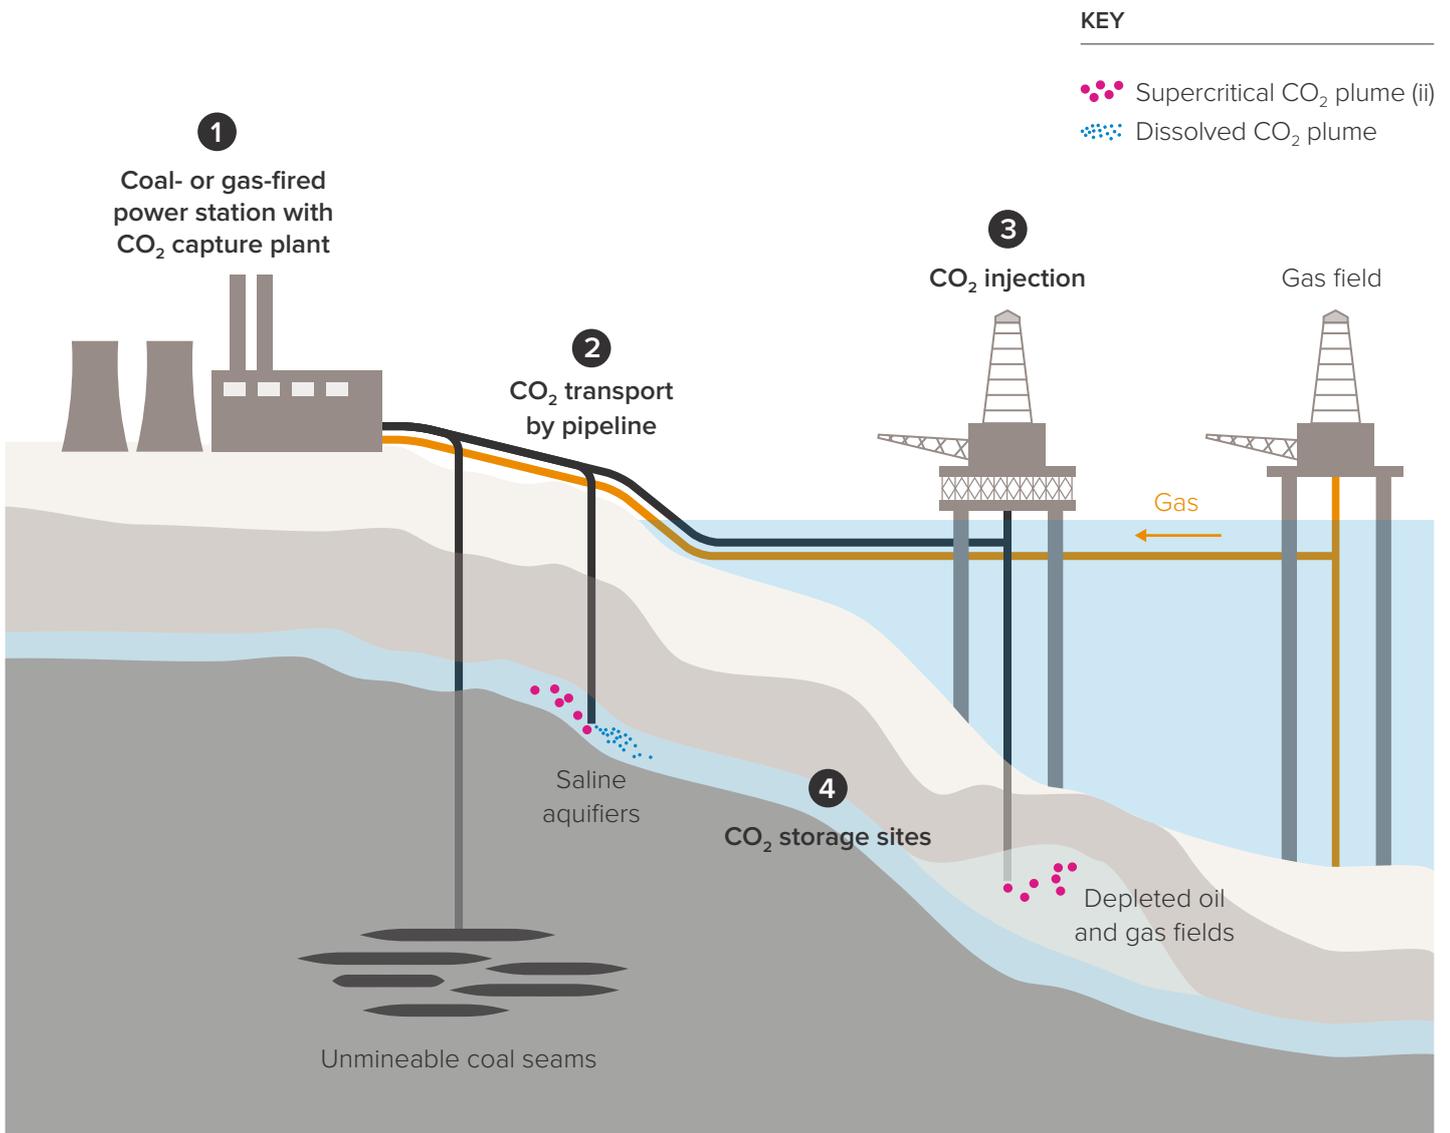

i. Diagram is not to scale. The burial of CO<sub>2</sub> is typically at 1 – 5km, and 50 – 300km from the coastline.

ii. Supercritical CO<sub>2</sub> is the natural fluid state of CO<sub>2</sub> at pressures deep underground.

## 2.1 Capture

CCS for power, industry and hydrogen can be implemented using four main technology routes:

- i. Post-combustion** – CO<sub>2</sub> is separated from a flue gas or exhaust stream using chemical solvents, solid adsorbents, or membranes which allow exhaust gases to pass, but capture CO<sub>2</sub> from the stream.
- ii. Pre-combustion** – a fuel such as natural gas or coal is converted into syngas (hydrogen, carbon monoxide and CO<sub>2</sub>), and then via a water-gas shift reaction to a mixture of hydrogen and CO<sub>2</sub>. The CO<sub>2</sub> is separated from the hydrogen by solvents, microporous solids, membranes, or other methods. The ‘blue’ hydrogen thus produced can be used in other processes including ammonia production, heating, and power generation.
- iii. Oxy-fuel combustion** – fuel is burned in pure oxygen (and recycled CO<sub>2</sub> to make flame temperatures manageable), making CO<sub>2</sub> easy to split from the fuel gas while water is cooled, condensed, and removed.
- iv. Separation of industrial process emissions** – emissions arise from the feedstock or process chemistry, as in natural gas processing or ethanol production, and are captured using one or more of the processes described above, or industry-specific technologies. As the capture of CO<sub>2</sub> is part of the core process, it is typically more economical than other methods.

## 2.2 Transport

Transport of CO<sub>2</sub> from a capture site to a store is often most economically undertaken by dedicated pipeline transporting CO<sub>2</sub> as a dense fluid at pressures greater than 1000psi. Thousands of kilometres (km) of CO<sub>2</sub> pipeline have been operated on land in North America since 1972, and hundreds of kilometres operated subsea since 1996 for offshore gas production operations using CCS in the North Sea and Barents Sea<sup>3,10</sup>. Where industries are located on coastlines or rivers, shipping tankers may be used to connect CO<sub>2</sub> sources to shared hubs of storage<sup>11,12</sup>.


## 2.3 Storage

CO<sub>2</sub> needs to be permanently stored in carefully selected underground porous rock formations with adequate porosity, permeability, and security. Primary targets are depleted gas fields and oilfields, or saline aquifers – porous sandstone formations containing undrinkable salt water. Storage depths typically range from 1 to 5 km<sup>1</sup>. Risks that CO<sub>2</sub> will leak once injected are very small, with research showing that 98% of the CO<sub>2</sub> can remain trapped for 10,000 years<sup>1,13</sup>. Sites are typically monitored for around 20 years to provide evidence for permanent containment<sup>14</sup>. When CO<sub>2</sub> is used for commercial EOR, most CO<sub>2</sub> remains stored, but the process typically produces ‘new’ CO<sub>2</sub> by way of incremental fuel production. However, if enhanced storage of CO<sub>2</sub> is needed for climate mitigation, additional CO<sub>2</sub> can be injected and safely stored in some oil and gas reservoirs, offsetting the life-cycle emissions of the oil to result in secure net storage<sup>15</sup>.

## 2.4 Examples operating worldwide in industry

FIGURE 2

Clusters of CCS plants operating or in development<sup>16</sup>.

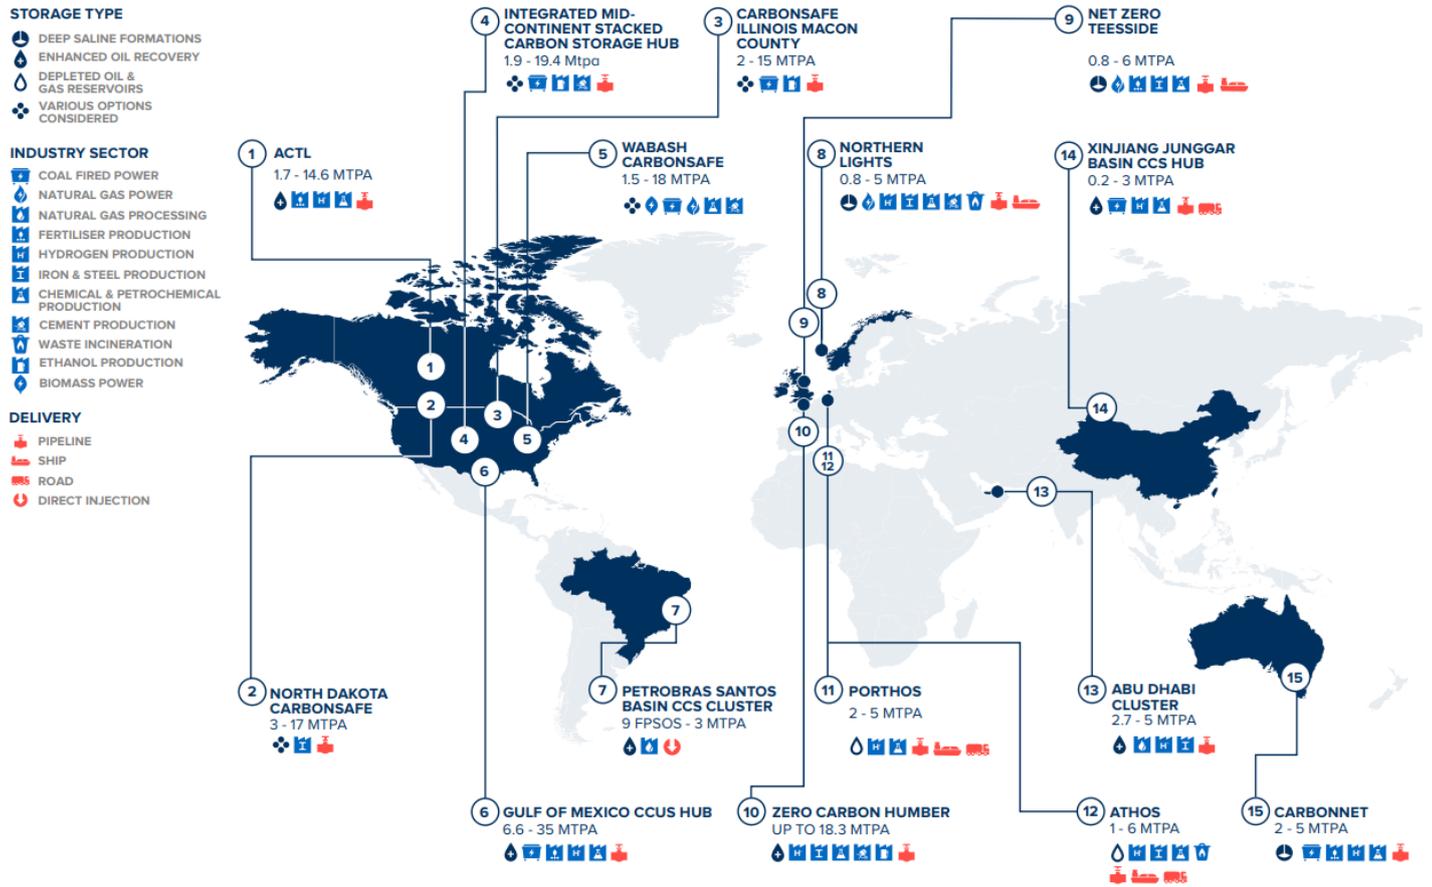

---

Global capture and storage capacity is now around 40MtCO<sub>2</sub>/yr.

---

#### Capture operations:

CCS has been proven to be effective in industrial scale facilities across key sectors (Figure 2)<sup>17</sup>. As of late 2020, 26 were operating; three were under construction; 13 in advanced development, reaching front end engineering design; and 21 in early development. Global capture and storage capacity is now around 40MtCO<sub>2</sub>/yr<sup>17</sup>. Around 30MtCO<sub>2</sub>/yr is sold for EOR while around 10MtCO<sub>2</sub>/yr is stored geologically to mitigate climate change. By 2030, capacity is expected to have grown to around 120MtCO<sub>2</sub>/yr<sup>17</sup>.

The operations now running cover a wide range of applications.

**Natural gas processing** uses well-established CO<sub>2</sub> separation technologies. Operations include Shute Creek (7MtCO<sub>2</sub>/yr) and Century Plant (5MtCO<sub>2</sub>/yr) in the USA as well as Gorgon (4MtCO<sub>2</sub>/yr) in Australia<sup>17</sup>.

**Coal-fired power with CCS** using amine solvent for post-combustion capture of CO<sub>2</sub> used for EOR has performed safely and effectively at two power stations: the Boundary Dam plant in Saskatchewan, Canada, since 2014<sup>17</sup>; and Petra Nova in Texas, since 2017. Petra Nova's operations were suspended in 2020 due to the impact of the low oil price on the EOR aspect of the project<sup>18</sup>.

**Gas-fired power with CCS** has not yet been undertaken at scale, although small-scale CO<sub>2</sub> capture without permanent storage has been used, commercially at a natural gas combined cycle plant in the US. A 'clean gas' project at Teesside, North-East England, is now proposed by a consortium of six energy companies, while two similar gas-power-CCS projects are being planned in the Humber region<sup>19, 20</sup>.

**Industrial CCS** has many applications including the following:

- 'Blue' hydrogen production in the QUEST project in Alberta, Canada, uses amine solvent to capture 1MtCO<sub>2</sub>/yr with 99.5% purity<sup>21</sup>. The Port Arthur refinery in Texas, uses pressure swing adsorption to separate CO<sub>2</sub>, leaving 99% pure hydrogen<sup>22</sup>.
- To decarbonise cement production, which accounts for 8% of the world's CO<sub>2</sub> emissions, the EU Low Emissions Intensity Lime and Cement industry-research collaboration (LEILAC) has run a demonstration plant at Lixhe, Belgium, and is designing a scaled-up plant at Hannover, Germany<sup>23</sup>.
- Norway's Longship CCS programme includes capture of CO<sub>2</sub> from the Brevik cement plant and a waste-to-energy facility in the Oslo-fjord region, shipping it in liquid form to an onshore terminal on the coast, from where it will be piped to storage under the North Sea by the Northern Lights project<sup>24, 25</sup>.
- Emirates Steel Industries in Abu Dhabi, has developed the first iron and steel plant with CCS, using methane reformed to a hydrogen / carbon monoxide syngas for direct reduction of iron ore<sup>26, 27</sup>.

#### Storage operations:

While much captured CO<sub>2</sub> is currently stored by means of enhanced oil recovery (EOR), geological storage has also been carried out and monitored to meet high performance standards for climate purposes<sup>28</sup>. For example, 1.7MtCO<sub>2</sub>/yr is stored in saline aquifers at the North Sea Sleipner and Snøhvit operations and 1MtCO<sub>2</sub>/yr in an onshore aquifer from the Quest project<sup>11</sup>. More than 12,000Gt of potential CO<sub>2</sub> storage resources have been identified worldwide and 400Gt have been evaluated as investable.

Technology can provide detailed monitoring of a storage site to ensure safety and compliance with local regulations. For example, time-lapse seismic reflection surveys can confirm the security and behaviour of stored CO<sub>2</sub> to the point where at the Sleipner storage site containing 20MtCO<sub>2</sub>, one metre-plus thick layers of CO<sub>2</sub> one kilometre below the surface can be detected<sup>29, 30</sup>.

## 3. Research, development, and deployment priorities

As with many technologies, the overarching barrier to deployment is cost. The IPCC has estimated the costs of avoiding emissions through CCS (in 2015 prices) as ranging from \$20/tCO<sub>2</sub> for the most economical usage in gas processing and bioethanol production to \$60–140/tCO<sub>2</sub> for fossil fuel-fired power generation and up to nearly \$190/tCO<sub>2</sub> for the costliest cement application<sup>3</sup>. These estimates compare with an average CO<sub>2</sub> price of only \$2/tCO<sub>2</sub> across the 22% of global emissions covered by pricing in 2020<sup>31</sup>, although prices have reached \$50/tCO<sub>2</sub> in the EU Emissions Trading System<sup>32</sup>. Industry estimates suggest that 450MtCO<sub>2</sub> could be captured, used, and stored with a commercial incentive as low as \$40/tCO<sub>2</sub> by deploying CCS on low-cost opportunities<sup>17</sup>.

The economic challenges explain why the majority of current projects are gas processing and bioethanol operations that sell CO<sub>2</sub> to oil companies for EOR. For geological capture, transport, and storage to be viable, capital, and operational costs need to fall, while the carbon price needs to rise in many markets, or storage obligations need to be applied.

Many CCS technologies are proven, and studies indicate that further deployment is the main key to accelerating progress<sup>5</sup>.

### 3.1 Deployment priorities

Several aspects of deployment are expected to reduce costs and facilitate new operations.

**Sharing learning** is a proven method of increasing learning rates and decreasing costs across an industry. For example, Shell has estimated that the QUEST project could now be built for 30% less than it was originally<sup>33</sup>. The Global CCS Institute (GCCSI) reports that the cost of capture reduced from over \$100/tCO<sub>2</sub> at the Boundary Dam facility in Canada to below \$65/tCO<sub>2</sub> for the Petra Nova facility in the US, some three years later<sup>17</sup>. The GCCSI estimates that with a learning rate – the fall in costs per doubling of capacity – of 8%, CCS costs can be expected to halve by mid-century<sup>17</sup>.

**Sharing infrastructure** in an industrial cluster reduces costs by common usage of pipelines or ships gathering CO<sub>2</sub> from several capture sites. In the UK, for example, the government has committed more than £1billion (around \$1.35billion) to help establish a series of clusters using CCS<sup>34</sup>. This is part of a projected 170MtCO<sub>2</sub>/yr of storage needed to reach net zero by 2050. Such growth is comparable to, but less than the North Sea's oil and gas development, where 15,000 boreholes were drilled, and 45,000km of pipelines laid<sup>35, 36</sup>.

**Global knowledge sharing** is also essential to enable rapid progress. Since many projects are supported by government, developers can be required to publish as much design and performance data as possible.

**Accelerated and repeated construction** is required to reduce capture costs and to improve system design. All components of the CCS chain, and several capture technologies, are already ready to deploy as pilots or at demonstrator scale, as they are at high technology readiness levels (7 – 9)<sup>37</sup>.

---

Many CCS technologies are proven, and studies indicate that further deployment is the main key to accelerating progress.

---

### 3.2 Novel capture technologies

Beyond the evolution of technologies that are already being deployed, there are some novel developments which could enable step changes in cost-effectiveness over the medium to long term, such as by increasing capture efficiencies towards 99%, decreasing the energy demand of CCS equipment, or reducing installation costs.

**Molten carbonate fuel cells (MCFC)** use hydrogen from a fuel source such as natural gas along with CO<sub>2</sub> from flue gas to produce electricity, heat, and water. The captured CO<sub>2</sub> exits the fuel cell at a high concentration and can easily be separated.

**Advanced cycles for combustion:** Techniques such as calcium and chemical looping – where an oxygen carrying substance is circulated through two reactors – work to improve the basic efficiency of the CO<sub>2</sub> capture process through better integration with the power supply process.

### Novel supercritical CO<sub>2</sub> (sCO<sub>2</sub>) techniques

use CO<sub>2</sub> at or above its critical temperature and pressure, offering potential benefits such as higher efficiency, lower capital costs and higher CO<sub>2</sub> capture rates. One emerging sCO<sub>2</sub> process attracting significant interest is the Allam-Fetvedt Cycle which creates a new type of power station. Rather than fitting a CCS unit onto a current combined cycle gas turbine (CCGT) plant, the turbine burns gas in a single operation with oxygen, with pure CO<sub>2</sub> becoming the working internal fluid, before capture or recycling. An Allam-Fetvedt Cycle demonstrator in Texas has reported a net efficiency of 59%, similar to a conventional gas-fired plant<sup>38</sup>.

### 3.3 Storage research priorities

Injection of CO<sub>2</sub> into geological storage has been securely undertaken since 1972. The future challenge is to undertake storage at tonnages running into billions rather than millions of tonnes. This will require improved monitoring, including subsurface detection and use of borehole sensors. More powerful computer models have a role in tracking CO<sub>2</sub> movement and ensuring its retention underground.

#### BOX 1

The Acorn Project – demonstrating combined CCS, DACCS and hydrogen.

Scotland's planned Acorn hub has been awarded the UK's first offshore CO<sub>2</sub> storage licence and provides a demonstration of CCS, DACCS, and 'blue' hydrogen production. The first phase will capture around 340,000t/yr of CO<sub>2</sub> from the St Fergus gas terminal in Aberdeenshire. The captured CO<sub>2</sub> will be piped into a sandstone reservoir around 100km offshore<sup>39</sup>. For the second phase, a new plant will produce 'blue' hydrogen from natural gas at St Fergus, storing the CO<sub>2</sub>, and feeding hydrogen into the national

gas transmission system, initially at a level of 2% then rising to 20%, thereby reducing carbon levels. The offshore reservoir also has potential to receive additional CO<sub>2</sub> from other sources including industrial sites, shipped CO<sub>2</sub> via the port of Peterhead; DACCS from Carbon Engineering could store CO<sub>2</sub>, share the same pipeline and undersea reservoir at a proposed facility near St Fergus developed by Pale Blue Dot Energy<sup>40</sup>. The project has been awarded £31 million by UKRI as part of the UK Industrial Decarbonisation Challenge<sup>41</sup>.

### 3.4 Negative Emissions Technologies (NETs)

Negative Emissions Technologies that capture CO<sub>2</sub> from the atmosphere are being researched for potential future deployment as they may be required to offset hard-to-abate emissions, as well as some historical emissions. Direct air capture with carbon storage (DACCS) is being piloted in a number of small-scale operations in North America and Europe, typically using chemical processes. Costs have been estimated at between \$200 and \$600/tCO<sub>2</sub><sup>42</sup>. Factors that could lower costs include improved processes resulting from rapid building and serial learning using small, modular plants directly above storage sites.

Other negative emissions technologies under study include carbon capture and use (CCU) creating building materials such as timber, straw, and cork, and also engineered products such as bricks, in ways that lock up some CO<sub>2</sub>. Biochar is a stable, long-lived product that stores carbon in soil having been produced by pyrolysis, or burning biomass with little oxygen.

Bioenergy with CCS (BECCS) has featured prominently in climate models to achieve negative emissions as it involves crops or trees absorbing CO<sub>2</sub> as they grow and then being burned for power or fuel while capturing CO<sub>2</sub>. However, its actual carbon footprint is heavily debated, given for example the carbon released in land clearance and harvesting<sup>43</sup>. Some experts argue BECCS could be applied sustainably, for example using sugar cane, arable grain straw or rice husks<sup>44</sup>.

Disadvantages of conventional CCS include reliance on capturing pure CO<sub>2</sub> from large-scale industrial facilities. By contrast, many NET technologies can be undertaken with low purity CO<sub>2</sub> using small, modular equipment positioned close to storage sites. If the future cost of NETs can be kept below that of the most costly applications of CCS, then NETs may be used to offset hard-to-abate emissions. For example, if CCS at \$120 t/CO<sub>2</sub> can remove 60% of emissions at a cement works but the remainder cost \$300 t/CO<sub>2</sub>, the operator may instead purchase CO<sub>2</sub> capture from air provided by a NET. This could lead to a global price cap on CO<sub>2</sub> capture.

#### BOX 2

##### Enhanced land weathering.

One form of enhanced weathering involves intensifying a century-old farming technique of spreading fine-grained rock dust, such as basalt, over cropland. This process accelerates a chemical reaction which removes CO<sub>2</sub> from the atmosphere, converting it to carbonate and bicarbonate ions which are either washed into the ocean, to increase alkalinity, or precipitated as carbonate minerals, like limestone, on land. The approach can also improve crop production, increase protection from pests and support soil fertility<sup>45</sup>. Small-scale field trials of rock weathering estimated the CO<sub>2</sub> capture in a range of 110–220g/m<sub>2</sub>, with capture efficiency

of around 60%. Basalt is available at scale, for example, produced as a waste product in mining gold, diamonds or nickel in countries such as Australia, Brazil and the US. This could provide enough material for 0.7 – 1.2 GtCO<sub>2</sub>/yr of sequestration, although mining can raise some social and political challenges. Costs for removing 0.5 – 2.0 GtCO<sub>2</sub>/yr have been estimated at \$80 – 180/tCO<sub>2</sub><sup>46</sup>. Pre-crushed waste rock dust is important to speed the chemical reaction rates- as high carbon energy for crushing significantly reduces the net carbon captured. Enhanced weathering requires further research and demonstration to gauge its potential.

## 4. Actions needed to deliver CCS – how it can grow

---

Three fundamental and inter-related barriers to CCS persistently surface: costs; security of storage; and regulatory frameworks.

---

Three fundamental and inter-related barriers to CCS persistently surface: costs; security of storage; and regulatory frameworks. These can be addressed by a combination of scientific evidence, technological innovation, and policy development. Policy frameworks are needed to help reduce costs, stimulate deployment, and provide operators with the opportunity to demonstrate secure storage.

One policy option would be to focus on research to create new technologies that represent a step change in effectiveness and cost. However, while novel approaches outlined above merit support, the pace of technology innovation and transfer to date suggests that such transformational options cannot be expected to be viable at scale until at least 2040.

Evidence suggests the main priority for progression is to deploy the available technologies more widely, with costs falling through learning-by-doing. Widespread deployment of CCS can lead not only to deep reductions in GHG emissions, but also to many benefits likely to secure public support, including high value jobs, and cleaner air.

CCS can be applied in a variety of strategies to achieve net zero. It can reduce emissions significantly in industries where process emissions occur, or fossil fuel use continues in some form, such as in gas power plants

or cement manufacture. It can decarbonise energy vectors such as hydrogen for use in multiple applications. It can create a 'circular carbon economy' by re-capturing emitted CO<sub>2</sub> from the air. It can also act as a transition to cleaner industrial processes, such as iron making using hydrogen instead of coal, where policy-makers want to avoid locking fossil fuels into the system for the long term.

Economic policy incentives are required for CCS, especially if the investment is to pay back before being replaced by zero-carbon energy options. Initially these can be provided by subsidies, technology-based performance standards and carbon pricing through emissions trading or taxes. But additional incentives are also needed to ensure CO<sub>2</sub> storage is initiated. In particular, market growth can be made reliable by Government mandates that ensure that any continued CO<sub>2</sub> production is balanced by its storage<sup>47</sup>.

One method of addressing both capital and operating costs of CCS is a 'Carbon Take Back Obligation' which requires producers and importers of fossil fuels to store a progressively increasing fraction of the CO<sub>2</sub> generated by the production, refining, transport and use of the products they sell<sup>47</sup>. The proportion would increase to 100% or even more to ensure that any ongoing emissions are balanced by the same quantity of carbon stored underground, reliably and for long duration.

## 5. Conclusion

CCS is required, especially becoming operational in the short to medium term, to fully decarbonise power generation, hydrogen production, emission-intensive industry, and other hard-to-abate activities. The present rates of CCS project construction are much too slow to create the capacity needed to fully contribute to the goal of net zero by 2050<sup>5</sup>. Government

actions to financially support and mandate CO<sub>2</sub> storage are essential. A deployment-led approach for CCS is now the optimum route to accelerate progress in reducing costs and scaling up the technologies. Policies are important, but delivery during this decade is essential. For as the IPCC's projections indicate, without CCS the Paris goals are likely to be out of reach.

This briefing is one of a series looking at how science and technology can support the global effort to achieve net zero emissions and adapt to climate change. The series aims to inform policymakers around the world on 12 issues where science can inform understanding and action as each country creates its own road map to net zero by 2050. To view the whole series, visit [royalsociety.org/climate-science-solutions](https://royalsociety.org/climate-science-solutions)

The text of this work is licensed under the terms of the Creative Commons Attribution License which permits unrestricted use, provided the original author and source are credited. The license is available at: [creativecommons.org/licenses/by/4.0](https://creativecommons.org/licenses/by/4.0)

Issued: May 2021 DES7287\_7 © The Royal Society

# References

1. Alcalde J *et al.* 2018 Estimating geological CO<sub>2</sub> storage security to deliver on climate mitigation. *Nature Commun.* **9**, 2201. (doi: 10.1038/s41467-018-04423-1)
2. Holloway S, Pearce J, Hards V, Ohsumi T, Gale J. 2007 Natural emissions of CO<sub>2</sub> from the geosphere and their bearing on the geological storage of carbon dioxide. *Energy* **32**, 1194–1201. (doi:10.1016/j.energy.2006.09.001)
3. IPCC. 2018 Global Warming of 1.5°C. An IPCC Special Report on the impacts of global warming of 1.5°C above pre-industrial levels and related global greenhouse gas emission pathways, in the context of strengthening the global response to the threat of climate change, sustainable development, and efforts to eradicate poverty. See <https://www.ipcc.ch/sr15/> (accessed 12 December 2020).
4. Climate Change Committee. 2020 Reducing UK emissions: Progress Report to Parliament. See <https://www.theccc.org.uk/publication/reducing-uk-emissions-2020-progress-report-to-parliament/> (accessed 12 December 2020).
5. Haszeldine RS, Flude S, Johnson G, Scott V. 2018 Negative emissions technologies and carbon capture and storage to achieve the Paris Agreement commitments. *Phil. Trans. R. Soc. A.* **376**, 20160447. (doi:10.1098/rsta.2016.0447)
6. International Energy Agency. 2020 CCUS in the transition to net-zero emissions. See <https://www.iea.org/reports/ccus-in-clean-energy-transitions/ccus-in-the-transition-to-net-zero-emissions> (accessed 15 December 2020).
7. Global CCS Institute. Capturing carbon dioxide (CO<sub>2</sub>). See <https://www.globalccsinstitute.com/about/what-is-ccs/capture/> (accessed 15 December 2020).
8. McKinsey & Company. 2020 How oil and gas companies can decarbonize. See <https://www.mckinsey.com/industries/oil-and-gas/our-insights/the-future-is-now-how-oil-and-gas-companies-can-decarbonize> (accessed 15 December 2020).
9. Scottish Carbon Capture & Storage. CCS Education Centre. See <https://www.sccs.org.uk/> (accessed 15 December 2020).
10. European Commission. 2019 The potential for CCS and CCU in Europe. See [https://ec.europa.eu/info/sites/default/files/iogp\\_-\\_report\\_-\\_ccs\\_ccu.pdf](https://ec.europa.eu/info/sites/default/files/iogp_-_report_-_ccs_ccu.pdf) (accessed 15 December 2020).
11. Northern Lights. 2021 What it takes to ship CO<sub>2</sub>. See <https://northernlightsccs.com/news/what-it-takes-to-ship-co2/> (accessed 15 March 2021).
12. Neele F *et al.* 2017 CO<sub>2</sub> Transport by Ship: The Way Forward in Europe. *Energy Procedia* **114**, 6824–6834. (doi:10.1016/j.egypro.2017.03.1813)
13. National Energy Technology Laboratory. Carbon Storage FAQs. See <https://www.netl.doe.gov/coal/carbon-storage/faqs/carbon-storage-faqs> (accessed 15 January 2021).
14. Climate Action. 2011 Implementation of Directive 2009/31/EC on the Geological Storage of Carbon Dioxide. See [https://ec.europa.eu/clima/sites/clima/files/lowcarbon/ccs/implementation/docs/gd3\\_en.pdf](https://ec.europa.eu/clima/sites/clima/files/lowcarbon/ccs/implementation/docs/gd3_en.pdf) (accessed 18 January 2021).
15. Stewart RJ, Johnson G, Heinemann N, Wilkinson M, Haszeldine RS. 2018 Low carbon oil production: Enhanced oil recovery with CO<sub>2</sub> from North Sea residual oil zones. *International Journal of Greenhouse Gas Control* **75**, 235–242. (doi:10.1016/j.ijggc.2018.06.009)
16. Global CCS Institute. 2020 Global Status of CCS 2020. <https://www.globalccsinstitute.com/wp-content/uploads/2021/03/Global-Status-of-CCS-Report-English.pdf> (accessed 18 January 2021).
17. SaskPower. Boundary Dam Carbon Capture Project. See <https://www.saskpower.com/Our-Power-Future/Infrastructure-Projects/Carbon-Capture-and-Storage/Boundary-Dam-Carbon-Capture-Project> (accessed 15 March 2021).
18. NRG. Petra Nova: Carbon Capture and the future of coal power. See <https://www.nrg.com/case-studies/petra-nova.html> (accessed 18 January 2021).
19. Net Zero Teesside. The UK's first decarbonised industrial cluster. See <https://www.netzeroteesside.co.uk/> (accessed 15 March 2021).
20. SSE. 2021 Plans for first-of-a-kind hydrogen and CCS projects. See <https://www.sse.com/news-and-views/2021/04/plans-for-first-of-a-kind-hydrogen-and-ccs-projects/> (accessed 16 April 2021).
21. Alberta Government. Quest Carbon Capture and Storage project: annual report 2019. See <https://open.alberta.ca/publications/quest-carbon-capture-and-storage-project-annual-report-2019> (accessed 15 March 2021).
22. Air Productions. Carbon Capture. See <https://www.airproducts.co.uk/company/innovation/carbon-capture/#/> (accessed 18 January 2021).
23. Low Emissions Intensity Lime & Cement. FAQs – Frequently Asked Questions. See <https://www.project-leilac.eu/faq> (accessed 15 March 2021).
24. Northern Lights. 2021 What we do. See <https://northernlightsccs.com/en/about> (accessed 15 March 2021).
25. CCS Norway. The Longship CCS Project. See <https://ccsnorway.com/the-project/> (accessed 15 March 2021).
26. Global CCS Institute. 2017 CCS: a necessary technology for decarbonising the steel sector. See <https://www.globalccsinstitute.com/news-media/insights/ccs-a-necessary-technology-for-decarbonising-the-steel-sector/#:~:text=The%20Abu%20Dhabi%20CCS%20Project%20%2D%20also%20called%20Emirates%20Steel%20Industries,produced%20by%20the%20DRI%20reactor> (accessed 15 March 2021).
27. Abu Dhabi Carbon Capture Company. 2017 Case Study: Al Reyadah CCUS Project. See <https://www.cslforum.org/cslf/sites/default/files/documents/AbuDhabi2017/AbuDhabi17-TW-Sakaria-Session2.pdf> (accessed 15 March 2021).
28. Jenkins C. 2020 The State of the Art in Monitoring and Verification: an update five years on. *International Journal of Greenhouse Gas Control* **100**, 103118. (doi: 10.1016/j.ijggc.2020.103118)
29. Pevzner, R *et al.* 2017 4D surface seismic tracks small supercritical CO<sub>2</sub> injection into the subsurface: CO<sub>2</sub>CRC Otway Project. *International Journal of Greenhouse Gas Control* **63**, 150-157. (doi: 10.1016/j.ijggc.2017.05.008)
30. Chadwick RA, Marchant BP & Williams GA. 2014 CO<sub>2</sub> storage monitoring: leakage detection and measurement in subsurface volumes from 3D seismic data at Sleipner. *Energy Procedia* **63**, 4224-4239. (doi: 10.1016/j.egypro.2014.11.458)
31. World Bank Group. 2020 State and Trends of Carbon Pricing 2020. See <https://openknowledge.worldbank.org/bitstream/handle/10986/33809/9781464815867.pdf?sequence=4&isAllowed=y> (accessed 08 February 2021).
32. Ember. Daily EU ETS carbon market price (Euros). See <https://ember-climate.org/data/carbon-price-viewer/> (accessed 15 March 2021).
33. Hydrocarbon Engineering. 2019 Shell's Quest CCS facility reaches CO<sub>2</sub> capture milestone. See <https://www.hydrocarbonengineering.com/the-environment/24052019/shells-quest-css-facility-reaches-co2-capture-milestone/> (accessed 15 March 2021).

34. HM Government. 2020 The Ten Point Plan for a Green Industrial Revolution. See <https://www.gov.uk/government/news/pm-outlines-his-ten-point-plan-for-a-green-industrial-revolution-for-250000-jobs> (accessed 15 January 2021).
35. Helmholtz Centre for Ocean Research Kiel (GEOMAR) Extensive gas leaks in the North Sea: Abandoned wells. See <https://www.sciencedaily.com/releases/2020/07/200730113055.htm#:~:text=The%20positions%20of%20the%20boreholes,Sea%2C%20adds%20Dr%20Haeckel> (accessed 18 February 2021).
36. Oil & Gas UK. 2013 Decommissioning of pipelines in the North Sea Region 2013. See <https://oilandgasuk.co.uk/wp-content/uploads/2019/05/OGUK-Guidelines-on-Decommissioning-of-Pipelines-in-the-North-Sea-Region-Issue-1.pdf> (accessed 18 February 2021).
37. Bui M *et al.* 2018 Carbon capture and storage (CCS): the way forward. *Energy Environ. Sci.* **11**, 1062. (doi: 10.1039/C7EE02342A)
38. International Energy Agency. 2020 The role of CCUS in low-carbon power systems. See <https://www.iea.org/reports/the-role-of-ccus-in-low-carbon-power-systems> (accessed 18 February 2021).
39. Pale Blue Dot. Acorn CCS & Acorn Hydrogen. See <https://pale-blu.com/acorn/> (accessed 18 February 2021).
40. Pale Blue Dot. 2020 Pale Blue Dot Energy and Carbon Engineering create partnership to deploy Direct Air Capture in the UK. See [https://pale-blu.com/2020/09/17/pale-blue-dot-energy-and-carbon-engineering-create-partnership-to-deploy-direct-air-capture-in-the-uk/#:~:text=News-,Pale%20Blue%20Dot%20Energy%20and%20Carbon%20Engineering%20create%20partnership%20to,Air%20Capture%20in%20the%20UK&text=Pale%20Blue%20Dot%20Energy%20are,2\)%20out%20of%20the%20atmosphere](https://pale-blu.com/2020/09/17/pale-blue-dot-energy-and-carbon-engineering-create-partnership-to-deploy-direct-air-capture-in-the-uk/#:~:text=News-,Pale%20Blue%20Dot%20Energy%20and%20Carbon%20Engineering%20create%20partnership%20to,Air%20Capture%20in%20the%20UK&text=Pale%20Blue%20Dot%20Energy%20are,2)%20out%20of%20the%20atmosphere) (accessed 18 February 2021).
41. UK Research and Innovation. 2021 UKRI awards £171m in UK decarbonisation to nine projects. See <https://www.ukri.org/news/ukri-awards-171m-in-uk-decarbonisation-to-nine-projects/> (accessed 12 April 2021).
42. The Royal Society & Royal Academy of Engineering. 2018 Greenhouse gas removal. See <https://royalsociety.org/topics-policy/projects/greenhouse-gas-removal/> (accessed 20 January 2021).
43. Brack D & King R. 2020 Managing land-based CDR: BECCS, Forests and Carbon Sequestration. *Global Policy* **12**, 45-56. (doi: 10.1111/1758-5899.12827)
44. Department for Business, Energy & Industrial Strategy. 2020 The potential of bioenergy with carbon capture. See <https://www.gov.uk/government/publications/the-potential-of-bioenergy-with-carbon-capture> (accessed 19 February 2021).
45. Beerling DJ *et al.* 2018 Farming with crops and rocks to address global climate, food and soil security. *Nature Plants* **4**, 138-147. (doi: 10.1038/s41477-018-0108-y)
46. Beerling DJ *et al.* 2020 Potential for large-scale CO<sub>2</sub> removal via enhanced rock weathering with croplands. *Nature* **583**, 242-248. (doi: 10.1038/s41586-020-2448-9)
47. Carbon Takeback. See <https://carbontakeback.org/> (accessed 08 February 2021).